



## TABLET ENCLOSURE USER GUIDE


Description	Part Number
APPLE iPad 10.2" ENCLOSURE	AS7.W001.100
APPLE iPad 10.9" ENCLOSURE	AS7.W001.101
SAMSUNG GALAXY TAB A7 ENCLOSURE	AS7.W001.200
SAMSUNG GALAXY TAB A9+ ENCLOSURE	AS7.W001.250

### Product Mounting Disclaimer

Precision Mounting Technologies Ltd (PMT) are not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use PMT products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. PMT specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures' specifications and recommendations, PMT product instruction sheets, or workmanship standards as endorsed through PMT policies and EULA.




# DESCRIPTION OF PARTS

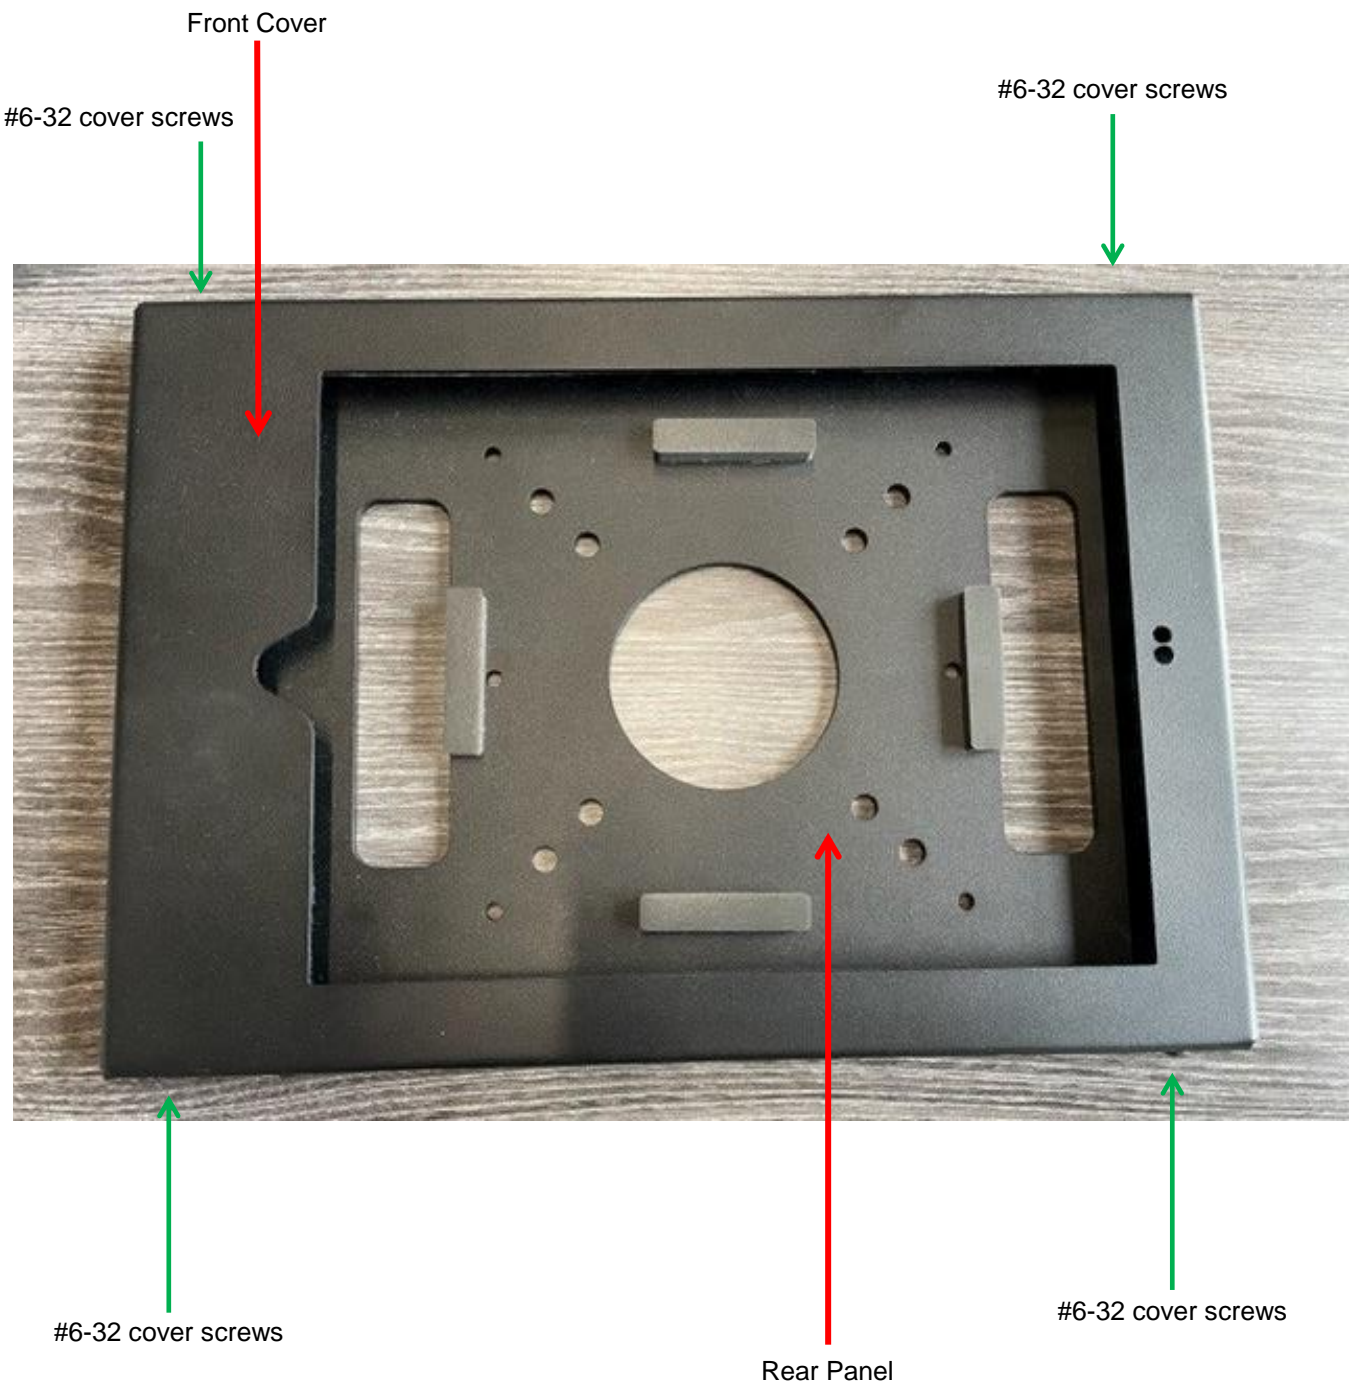

# INSTALLATION INSTRUCTIONS


## Step 1

Using a 5/64" Allen/hex key wrench, remove the 4x cover screws so the front cover plate can be removed.

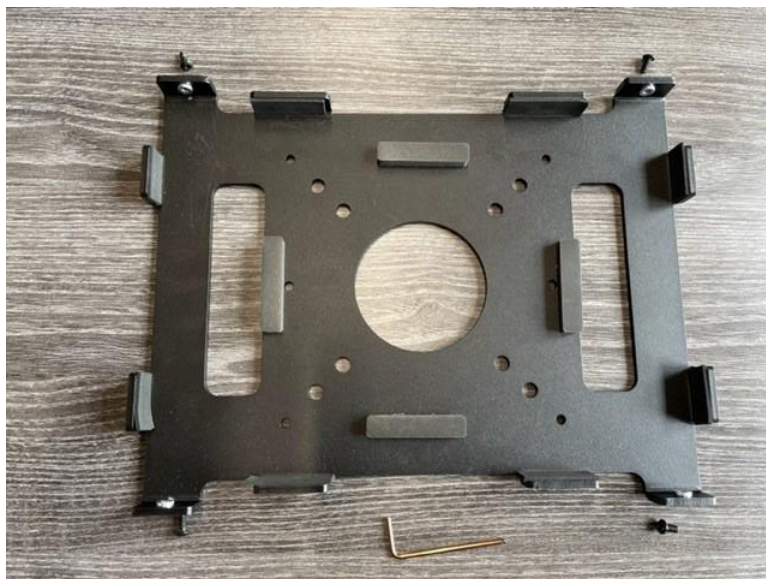

## Step 2

Attach rear panel to mounting surface using 4x screws (not provided in kit) suitable for install location. Note the enclosure can be mounted in any direction.

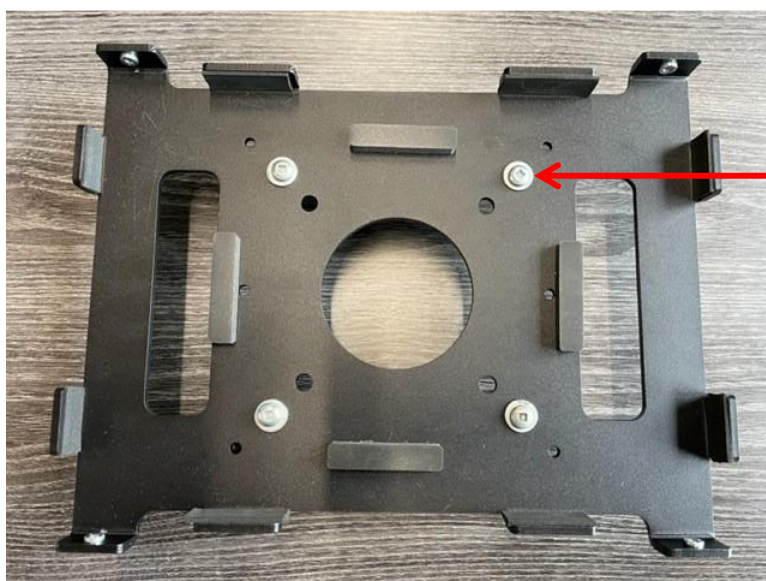

Mounting  
screws (4x)

# INSTALLATION INSTRUCTIONS

## Step 3

Place tablet in the mount and ensure foam pads are holding securely (the tablet should not be loose), and ensure the tablet is not contacting the mounting screw heads used in step 2.



## Step 4

Attach power/USB cable to the tablet securely and route the cable in the direction of choice. PMT recommends using a plastic wire tie where possible to prevent disconnection. Note the cable can be routed out of the enclosure either going straight out, up or down, and also can be routed back for a clean install depending on install location and infrastructure used.





# INSTALLATION INSTRUCTIONS

## Step 5

Place the Front Cover plate over the unit so that the cut-outs align with front buttons, sensors, and cameras (side buttons will be covered for tamper resistance) while being careful to not pinch any cables. Carefully re-attach the 4x screws to secure the front cover to the rear panel.



Installation is now complete.