



Dash Strap Mount

Part# AS5.S500.001

User Guide

*Enclosed pictures and devices are for reference only, individual vehicles and devices will vary

Step 1: Position the Mount

The Dash Strap Mount works by tightening itself against the vehicle dash via 4 adjustable rubber bumpers, and 3 adjustable nylon straps that tension the mount tight to the dash.


To begin the install process, find an appropriate spot on the dash that the adjustable rubber bumpers can rest against without causing any damage to the vehicle. This should be a spot that provides adequate support for the mount, and does not block essential vehicle controls such as gear shifts, and steering wheels.

Note that the side with the single strap goes up, and the hinge should open to the right (passenger) side.

Tip: The mount has a total of eight (8) positions that the rubber bumpers can be positioned, so if you are having difficulty positioning the mount in the standard positions, try moving the bumpers to a different set of holes.



Step 2: Attach Straps

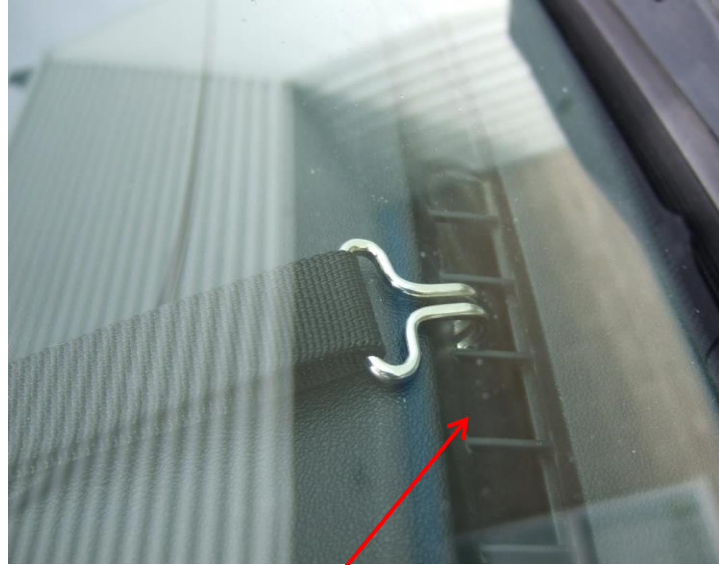

Windshield vent

First attach the top strap to the vehicle by hooking the end into a secure location near the windshield (usually the windshield vents).

Now slightly tighten the strap by pulling on the loose end so that the mount hangs in your desired location.

Note: DO NOT install any straps or the mount itself directly over any airbag locations. Consult vehicle owners manual for info on air bags and locations.

Step 2 continued



Install the bottom straps by attaching to the lip of the upper foot well trim of the vehicle.

Foot well trim (passenger side, below glove box).



Step 2 Continued



Next, position the driver side lower strap


Lower foot well trim (driver side, under steering wheel)



Now tighten the lower straps by pulling on the loose ends of the strap. Watch to make sure that the rubber bumpers are still located where you want them. Tighten the upper strap as well if needed.

Step 3: Final Adjustments

If required, adjust the length of the rubber bumpers by turning them in or out to ensure the bumpers are a tight fit against the dash.

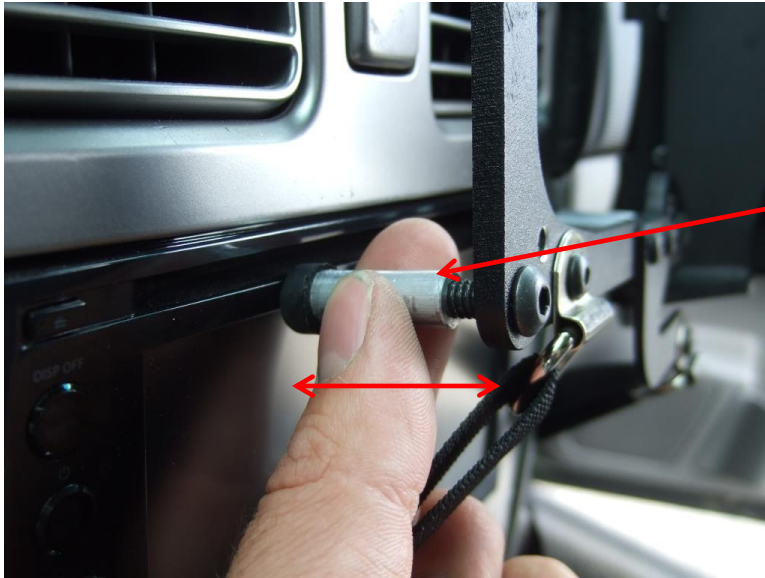

Adjust length in or out if required



Do a final tightening of all straps if required, and tie or wrap excess strapping to prevent interference with vehicle controls.

Finished



Installation is now complete. Note that the mount allows for 90 degree rotation for portrait or landscape viewing on the fly, and has a stop bolt that allows the unit to rotate so that the charging cable is never towards the steering wheel.

The unit also allows for swing out so easy access to vehicle controls is still possible when using the dash strap mount.



Removal



Removing the Dash Strap Mount is as easy as pulling the lip of the buckle away from the strap, and loosening the strapping.

Note that this is only required for the bottom two straps. Once the bottom straps are loosened, simply un-hook the top strap from the vent, and remove the mount.

Re-install will be simply positioning the hooks and tightening if re-installing into the same vehicle.



For more info: www.precisionmounts.com

Toll Free: 1-888-869-7652

Email: info@precisionmounts.com