



2025+ FORD POLICE INTERCEPTOR UTILITY RADIO DASHMOUNT USER GUIDE


Description	Part Number
2025+ FORD POLICE INTERCEPTOR UTILITY RADIO DASHMOUNT WITH CENCOM AND DUAL MIC	AS4.C245.301
2025+ FORD POLICE INTERCEPTOR UTILITY DASHMOUNT WITH CENCOM	AS4.C245.302

Product Mounting Disclaimer

Precision Mounting Technologies Ltd (PMT) are not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use PMT products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. PMT specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures' specifications and recommendations, PMT product instruction sheets, or workmanship standards as endorsed through PMT policies and EULA.



DESCRIPTION OF PARTS

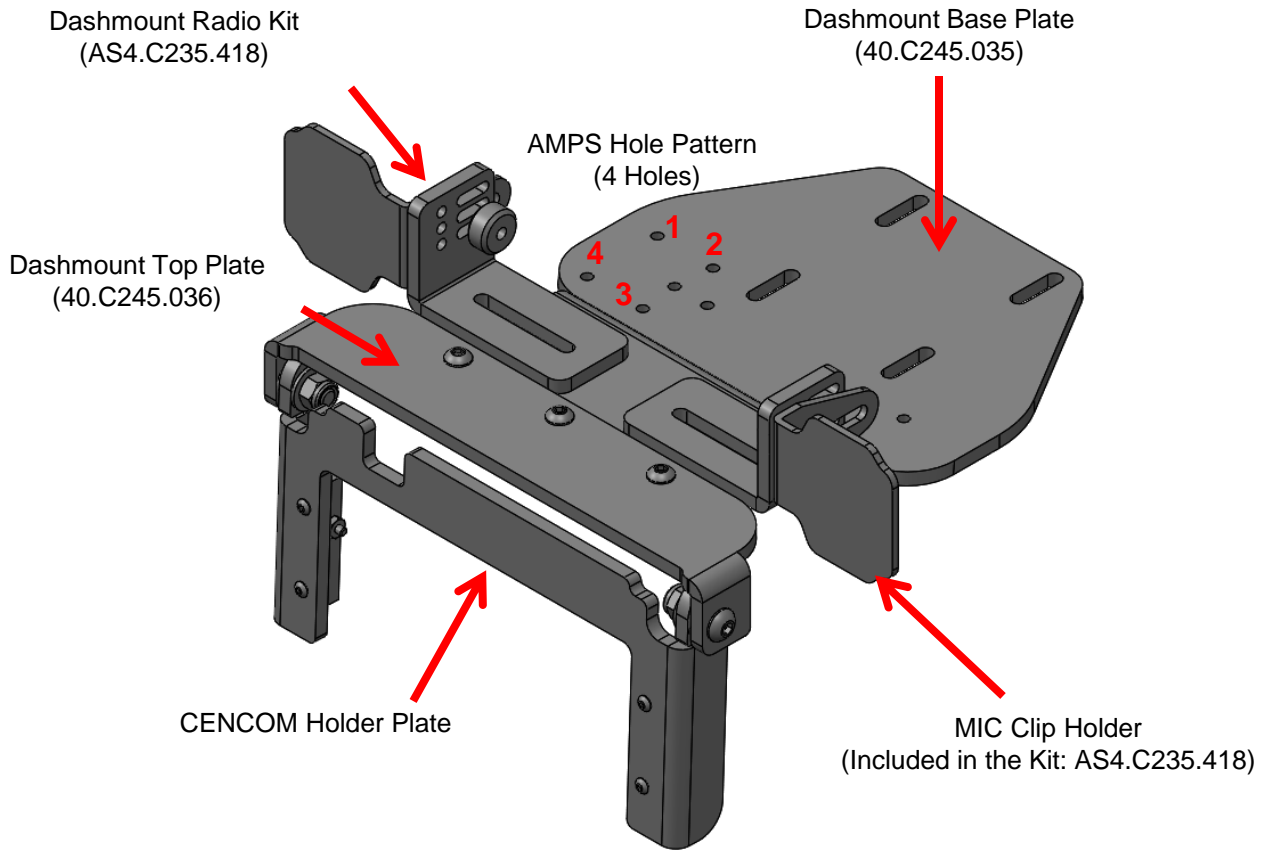

- **Base Plate:** Attaches to vehicle via the dash tray.
- **Top Plate:** Attaches to the base plate and allows the CENCOM plate to be mounted.
- **Radio Kit:** The kit attaches to the dash plate (two different positions possible) and accommodates the radios (adjustable).
- **CENCOM Holder Plate:** Attaches to the top plate and allows a CENCOM unit to be attached.
- **Mic Clip Holder:** The MIC clip helps in attaching and holding the microphone.
- **AMPS Hole Pattern:** This is a Zirkona mounting solution.

INSTALLATION INSTRUCTIONS

Tools and hardware required:


- Socket set suitable for #1/4-20 and M5.
- 1/4-20 and M5 hex keys

Step 1

Remove the dash tray by removing 2 M5 screws below with the appropriate hex key, see below picture #1.



Picture 1

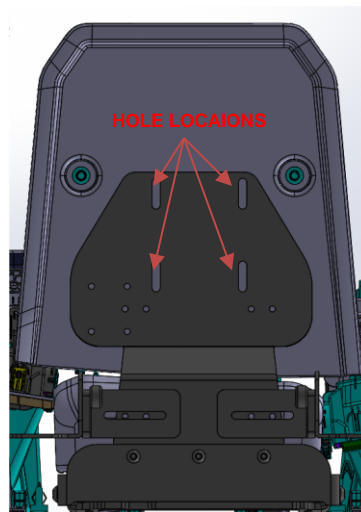

Picture 2

Step 2

- Align the radio dashmount on the dash tray as shown in picture 2.
- Align the base plate edge to the rear edge of the upper dashmount and center it.
- Drill 4 #1/4-20 holes through the dash tray at the rearward edge of base plate slots. This will allow for slight rearward adjustment if needed later.

INSTALLATION INSTRUCTIONS


Step 3

- Ensure that the holes drilled in the previous step has penetrated through the plate underneath the OEM dash tray shown in picture 3 & 4.
- Picture 3 shows the plate under the dash tray before the clearance holes are drilled.



Picture 3


5x #1/4-20
Clearance holes

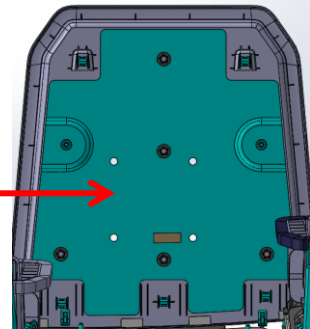

Picture 4

Step 4

Assemble the radio dashmount assembly, OEM dash tray and OEM plate below the dash tray. Use the supplied hardware as shown below.

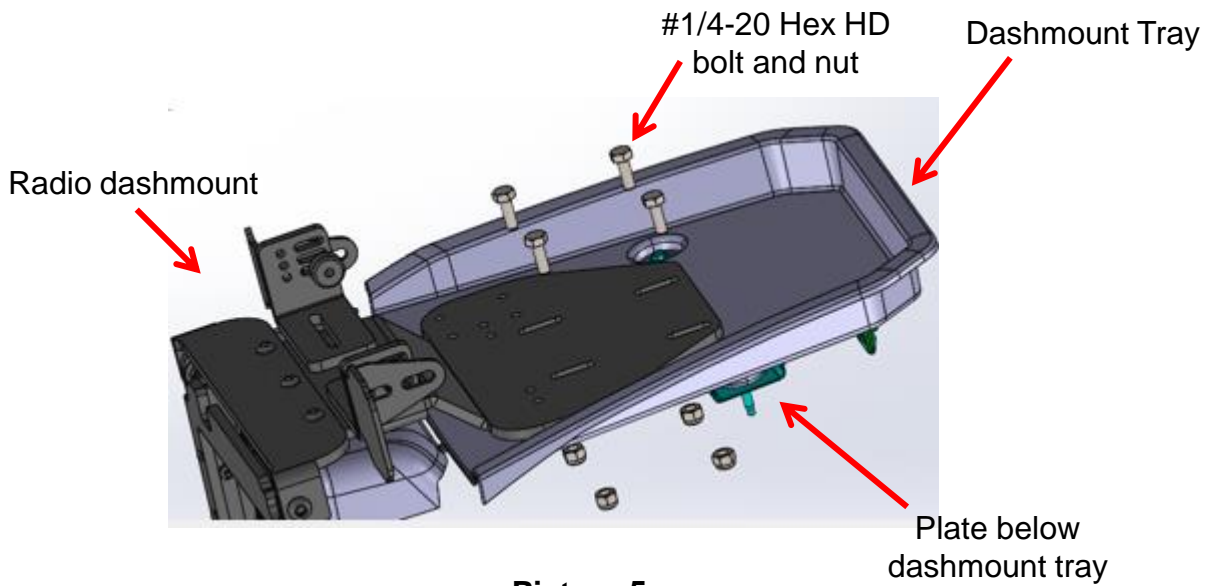

Picture 5

INSTALLATION INSTRUCTIONS

Step 5

Assemble the unit on the vehicle dash by using the OEM M5 screws – which were removed in Step 1. Final installation is shown below. Assemble the microphone to the MIC clip of radio dashmount (using the magnetic clip – to be fitted on MIC clip).



Picture 6